



GV-TPCI6VPR

16 Port UTP Active Hub

USER MANUAL

Key Features

The GV-TPCI6VPR is a multi-port active video hub which can be installed in one compact 19" wide 1U panel. Panels can reside in the same rack as other equipment, such as switchers, multiplexers, DVRs, video conferencing equipment, etc. They are perfect for larger CCTV installations and ideal for security monitoring stations.



- Transmit a full motion color or monochrome video signal over cost effective UTP cable.
- Built in 16 port GV-TPCVPR active receivers in 1U 19" rack mounting panel.
- Easy setting with 2 adjustments for color gain and brightness.
- Built in a highly balanced mode of video transmission for extra interference immunity.
- Built in transient protection and ground lifting.
- Working range: 2000 feet (600 meters) when working with passive video balun, up to 4920 feet (1500 meters) when working with UTP active transmitter GV-TPCVPT.
- Power supply included.

**To get the best video quality for the longest cable distance, a Single Channel Active UTP Video Transmitter is recommended.*

Product Overview



Installation View

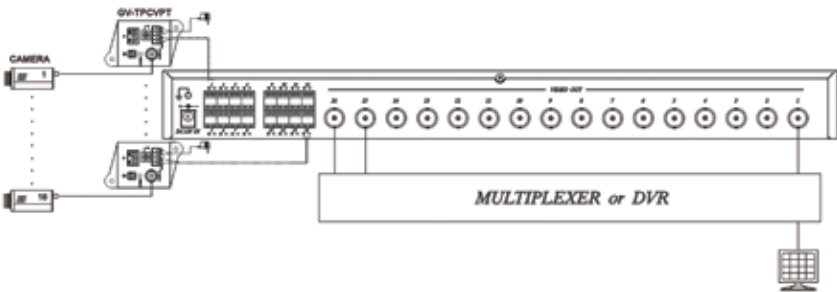

Please note “+”, “-” of signal and cable, picture will be twisted or unclear if they are not properly connected.

Removable terminal block for easy installation.

Specification

Item No.	GV-TPC16VPR
Video Input Port	16 Port (Terminal Block)
Video Output Port (BNC Connector)	16 Port, 1Vp-p, 75 ohms
Power Input	DC 12V
Power Consumption	500mA
Recommend Cable	CAT 5 Cable 4 Pairs (24 AWG)
Power Adapter	Included
Dimension (W x H x D mm)	482 x 170 x 44 (1U)
Weight (g)	2720g
Material	Metal Black

RoHS   

